




CARPARK PAVERS

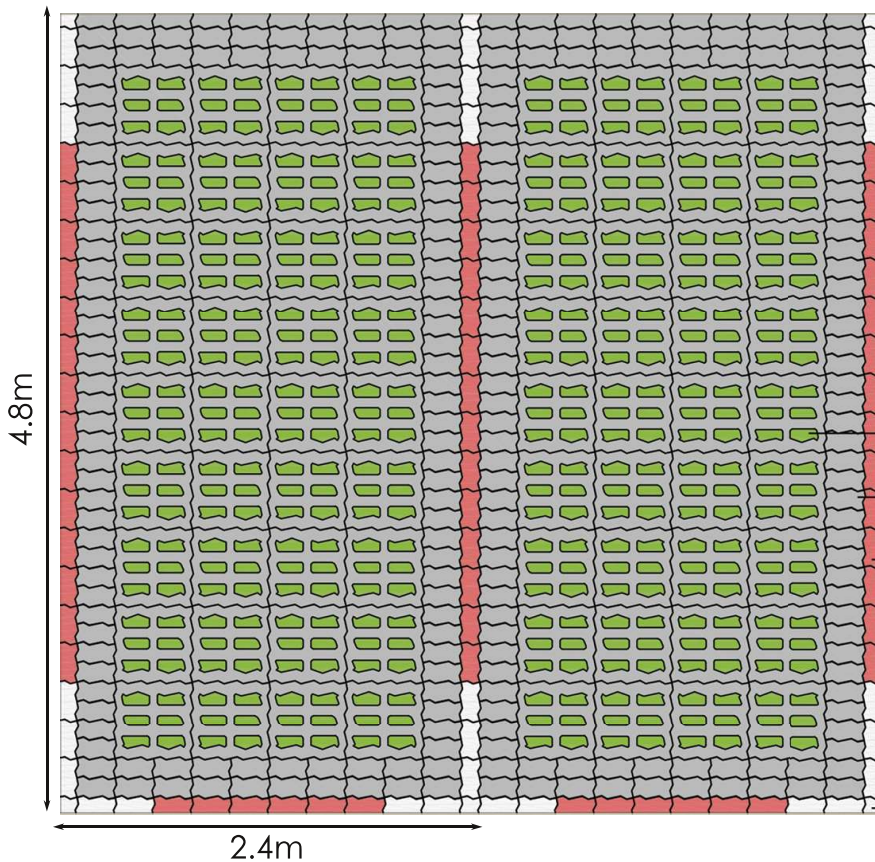


SUPER UNI GRASSPAVE
 Dimensions: 453x453x100mm
 Coverage: 4.83pc per m²
 Weight: 30.7kg per pc

SUPER UNIPAVE
 Dimensions: 225X111x100mm
 Coverage: 38.8pc per m²
 Weight: 5.5kg per pc

SUPER UNIPAVE STARTER
 Dimensions: 225X111x100mm
 Coverage: 38.8pc per m²
 Weight: 5.5kg per pc



Line Colours
 Standard: Red, Grey & Black
 Special Colours: White, Yellow & Blue



Blue and white
 colour
 available for
 handicapped
 lots only

TECHNICAL SPECS

SPECIFICATIONS*

THICKNESS	STRENGTH	APPLICATION	TOLERANCE
60MM	35MPa	Pedestrian Traffic i.e. Footpath, Bicycle Track, Jogging Track, Park & Garden Landscape, Pool Deck, Patio etc.	Thickness ±3mm Dimension ±2mm
80MM	45MPa	Vehicular Traffic i.e. Driveway, Drop-off area, Warehouse and Industrial Area, Temporary Access, Backlane, Feeder Road, Internal Road etc.	
100MM	45MPa	Heavy Duty Traffic i.e. Inland and Maritime Ports, Fire Engine Access etc.	

*MS1380:1995 / BS6717:1993 / BS EN 1338:2003 standards
(Specification for Precast Concrete Paving Blocks)

COLOURS

STANDARD



Red



Grey



Black

SPECIAL



Peach



Green



Brown



White



Yellow




Blue



Antique (mixed shades)




TYPICAL INSTALLATION CROSS SECTION

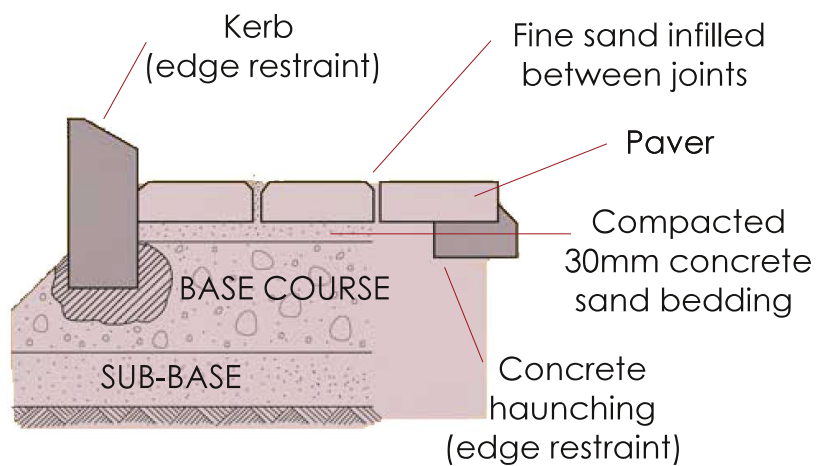


EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. It typically fades over a few months, up to a maximum of two years.


TYPICAL PAVING PATTERNS

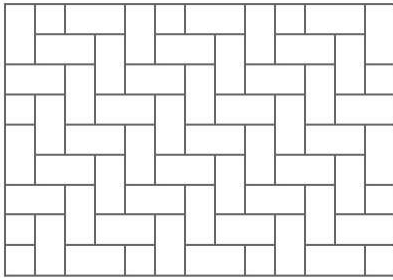


Herringbone

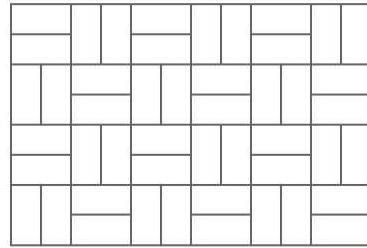

Basketweave

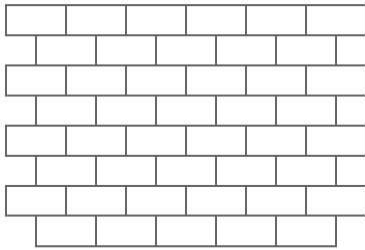

Brick

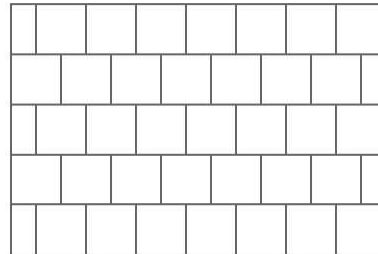

Block

BA CONTRACTS PTE LTD

Address: 48 Hillview Terrace,
Hillview Building,
#03-02, Singapore 669269

Tel: +65 6842 2239

Fax: +65 6848 1229

Email: hello@bac.com.sg

