


PAVING FLAGS

Paving flags are 60mm thick square and rectangular pavers used for pedestrian areas. Examples include town squares, footpaths, gardens and parks. These can be installed in a flexible pavement using the sand bedding method or in a fixed pavement using cement mortar.



QUADPAVE 60 (QP60)

Dimensions: 198x98x60mm
Coverage: 25pc per m²
Weight: 6kg per pc

SQUAREPAVE 60 (SP60)

Dimensions: 200x200x60mm
Coverage: 25pc per m²
Weight: 6kg per pc

PAVING FLAG 24 (PF24)

Dimensions: 200x400x60mm
Coverage: 12.5pc per m²
Weight: 10.42 kg per pc

PAVING FLAG 44 (PF44)

Dimensions: 400x400x60mm
Coverage: 6.25pc per m²
Weight: 22 kg per pc

PAVING FLAG 46 (PF46)

Dimensions: 400x600x60mm
Coverage: 4.16pc per m²
Weight: 33 kg per pc

PAVING FLAG 66 (PF66)

Dimensions: 600x600x60mm
Coverage: 2.78pc per m²
Weight: 49 kg per pc

TECHNICAL SPECS

SPECIFICATIONS*

THICKNESS	STRENGTH	APPLICATION	TOLERANCE
60MM	35MPa	Pedestrian Traffic i.e. Footpath, Bicycle Track, Jogging Track, Park & Garden Landscape, Pool Deck, Patio etc.	Thickness ±3mm Dimension ±2mm
80MM	45MPa	Vehicular Traffic i.e. Driveway, Drop-off area, Warehouse and Industrial Area, Temporary Access, Backlane, Feeder Road, Internal Road etc.	
100MM	45MPa	Heavy Duty Traffic i.e. Inland and Maritime Ports, Fire Engine Access etc.	

*MS1380:1995 / BS6717:1993 / BS EN 1338:2003 standards
(Specification for Precast Concrete Paving Blocks)

COLOURS

STANDARD



Red



Grey



Black

SPECIAL



Peach



Green



Brown



White



Yellow




Blue



Antique (mixed shades)


TYPICAL INSTALLATION CROSS SECTION

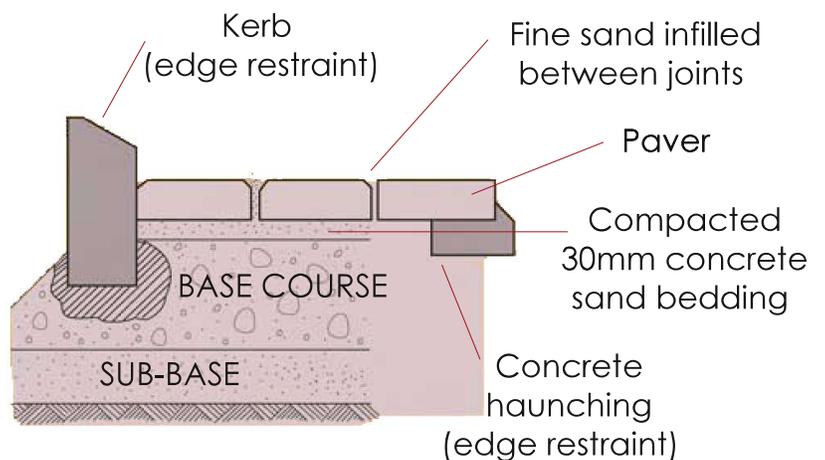


EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. It typically fades over a few months, up to a maximum of two years.


TYPICAL PAVING PATTERNS

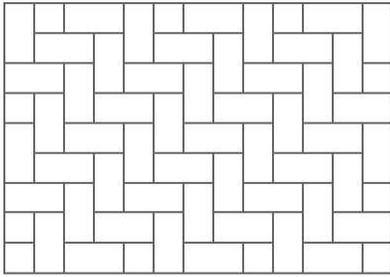


Herringbone

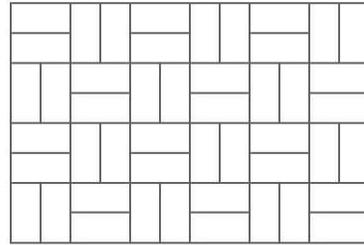

Basketweave

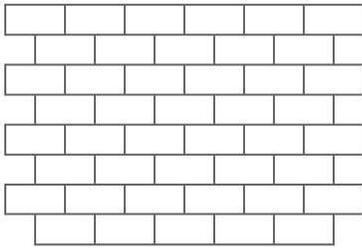

Brick

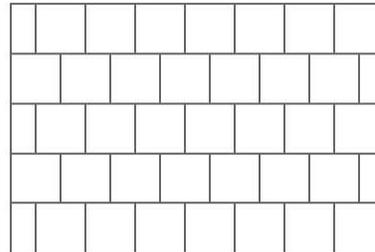

Block

BA CONTRACTS PTE LTD

Address: 48 Hillview Terrace,
Hillview Building,
#03-02, Singapore 669269

Tel: +65 6842 2239

Fax: +65 6848 1229

Email: hello@bac.com.sg

