



# M2 PAVERS\*

	M2-60	M2-80
Dimensions	120X160mm/160x160mm/240x160mm	
Thickness	60mm	80mm
Area Coverage	12 sets per m2	
Weight	10.1kg per set	13kg per set
Std colours	Grey, Red, Black	



\*Only sold in full sets of 3 sizes in the same colour.

# TECHNICAL SPECS

## SPECIFICATIONS\*

THICKNESS	STRENGTH	APPLICATION	TOLERANCE
60MM	35MPa	Pedestrian Traffic i.e. Footpath, Bicycle Track, Jogging Track, Park & Garden Landscape, Pool Deck, Patio etc.	Thickness ±3mm
80MM	45MPa	Vehicular Traffic i.e. Driveway, Drop-off area, Warehouse and Industrial Area, Temporary Access, Backlane, Feeder Road, Internal Road etc.	Dimension ±2mm
100MM	45MPa	Heavy Duty Traffic i.e. Inland and Maritime Ports, Fire Engine Access etc.	

\*MS1380:1995 / BS6717:1993 / BS EN 1338:2003 standards  
(Specification for Precast Concrete Paving Blocks)

## COLOURS


### STANDARD



Red



Grey



Black

### SPECIAL



Peach



Green



Brown



White



Yellow




Blue



Antique (mixed shades)




## TYPICAL INSTALLATION CROSS SECTION

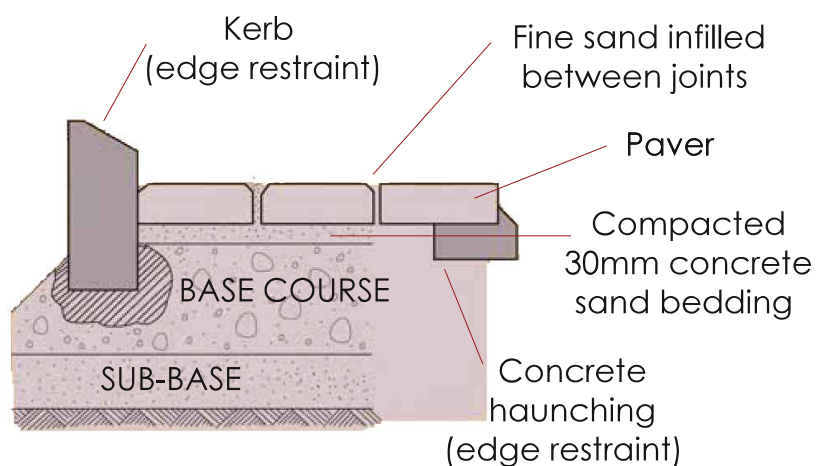


## EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. It typically fades over a few months, up to a maximum of two years.


# TYPICAL PAVING PATTERNS

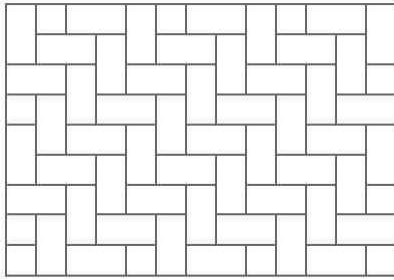


Herringbone

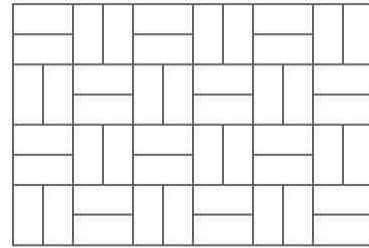

Basketweave

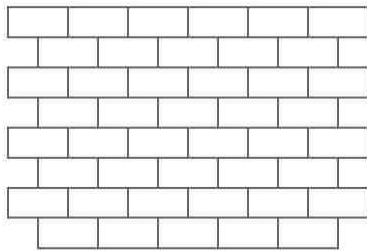

Brick

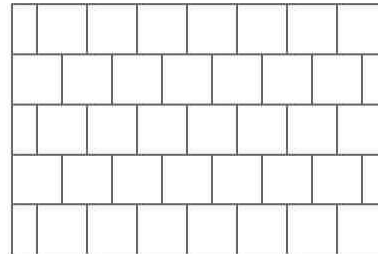

Block

## BA CONTRACTS PTE LTD

Address: 48 Hillview Terrace,  
Hillview Building,  
#03-02, Singapore 669269

Tel: +65 6842 2239

Fax: +65 6848 1229

Email: [hello@bac.com.sg](mailto:hello@bac.com.sg)

