

COBBLEPAVE 1.0



| | CP1.0 |
|------------------|--------------|
| Dimensions | 100X100 |
| Thickness | 100mm |
| Area Coverage | Varies* |
| Weight | 2.2kg per pc |
| Standard Colours | Grey only |

* For grout size of 15mm, approx. 75.6pc per m2

COBBLEPAVE 2.0



| | CP2.0 |
|------------------|---------------------|
| Dimensions | 125x125mm |
| Thickness | 80mm |
| Area Coverage | 64 pc per m2 |
| Weight | 2.4kg per pc |
| Standard Colours | Grey, Red and Black |

TECHNICAL SPECS

SPECIFICATIONS*

| THICKNESS | STRENGTH | APPLICATION | TOLERANCE |
|-----------|----------|---|--|
| 60MM | 35MPa | Pedestrian Traffic i.e. Footpath, Bicycle Track, Jogging Track, Park & Garden Landscape, Pool Deck, Patio etc. | Thickness ±3mm Dimension ±2mm |
| 80MM | 45MPa | Vehicular Traffic i.e. Driveway, Drop-off area, Warehouse and Industrial Area, Temporary Access, Backlane, Feeder Road, Internal Road etc. | |
| 100MM | 45MPa | Heavy Duty Traffic i.e. Inland and Maritime Ports, Fire Engine Access etc. | |

*MS1380:1995 / BS6717:1993 / BS EN 1338:2003 standards
(Specification for Precast Concrete Paving Blocks)

COLOURS


STANDARD



Red



Grey



Black

SPECIAL



Peach



Green



Brown



White



Yellow




Blue



Antique (mixed shades)


TYPICAL INSTALLATION CROSS SECTION

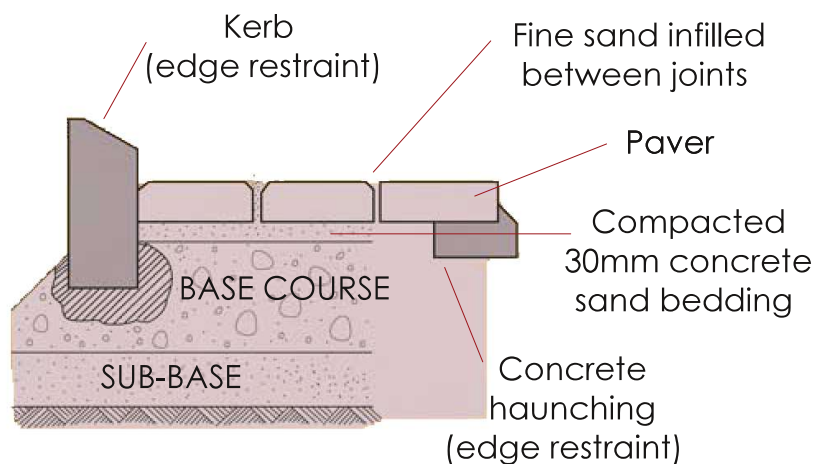


EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. It typically fades over a few months, up to a maximum of two years.


TYPICAL PAVING PATTERNS

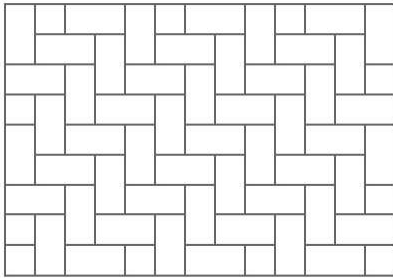


Herringbone

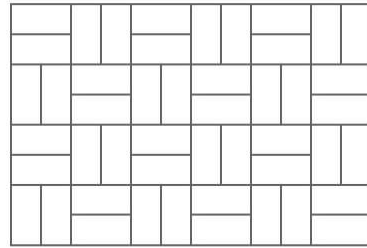

Basketweave

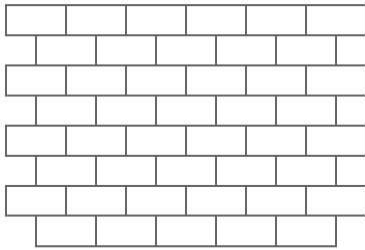

Brick

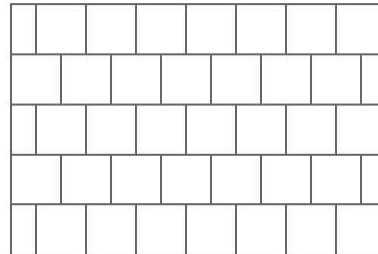

Block

BA CONTRACTS PTE LTD

Address: 48 Hillview Terrace,
Hillview Building,
#03-02, Singapore 669269

Tel: +65 6842 2239

Fax: +65 6848 1229

Email: hello@bac.com.sg

