

FLEXIPAVE PLUS



	FPP80
Dimensions	300X150mm
Thickness	80mm
Area Coverage	22.2 pc per m2
Weight	7.8kg per pc
Standard Colours	Grey, Red, Black

GEOPAVE



	GP60	GP80
Dimensions	200X200mm	
Thickness	60mm	80mm
Area Coverage	25 pc per m2	
Weight	4.9kg per pc	6.5kg per pc
Std colours	Grey, Red, Black	

TECHNICAL SPECS

SPECIFICATIONS*

THICKNESS	STRENGTH	APPLICATION	TOLERANCE
60MM	35MPa	Pedestrian Traffic i.e. Footpath, Bicycle Track, Jogging Track, Park & Garden Landscape, Pool Deck, Patio etc.	Thickness ±3mm Dimension ±2mm
80MM	45MPa	Vehicular Traffic i.e. Driveway, Drop-off area, Warehouse and Industrial Area, Temporary Access, Backlane, Feeder Road, Internal Road etc.	
100MM	45MPa	Heavy Duty Traffic i.e. Inland and Maritime Ports, Fire Engine Access etc.	

*MS1380:1995 / BS6717:1993 / BS EN 1338:2003 standards
(Specification for Precast Concrete Paving Blocks)

COLOURS

STANDARD



Red



Grey



Black

SPECIAL



Peach



Green



Brown



White



Yellow




Blue



Antique (mixed shades)




TYPICAL INSTALLATION CROSS SECTION

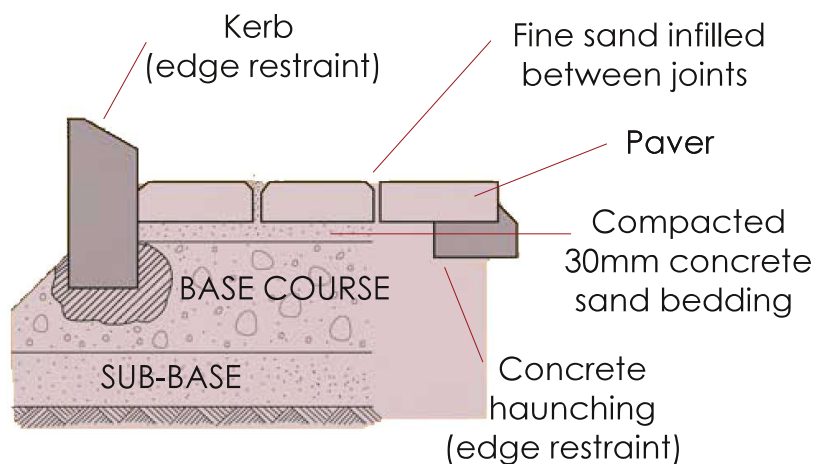


EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. It typically fades over a few months, up to a maximum of two years.


TYPICAL PAVING PATTERNS

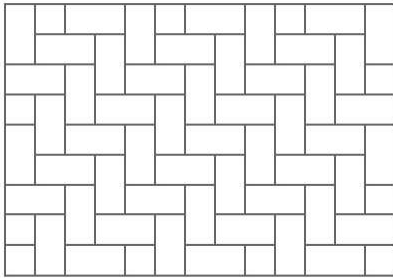


Herringbone

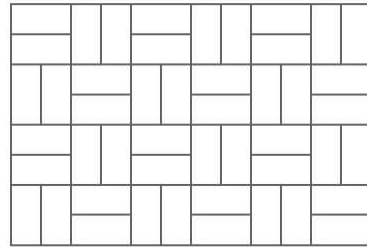

Basketweave

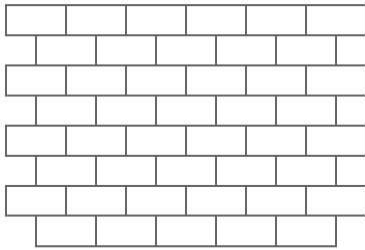

Brick

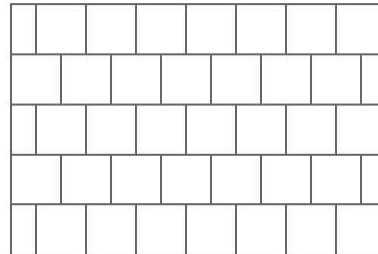

Block

BA CONTRACTS PTE LTD

Address: 48 Hillview Terrace,
Hillview Building,
#03-02, Singapore 669269

Tel: +65 6842 2239

Fax: +65 6848 1229

Email: hello@bac.com.sg

