




PAVING SOLUTIONS FOR CAR PARKS

TYPES	BLOCKS	DIAGRAM	DIMENSIONS (mm)	THICKNESS (mm)	COVERAGE (pcs/m ²)	AVERAGE WEIGHT (kg/pc)
A SUPER UNI-GRASSPAVE			453 x 453	100	4.83	30.7
B SUPER UNI-PAVE			225 x 111	100	38.80	5.50
C SUPER UNI-PAVE STARTER			225 x 111	100	36.50	5.50
D SUPER UNI-PAVE HALF BLOCK			111 x 111	100	84.70	2.60

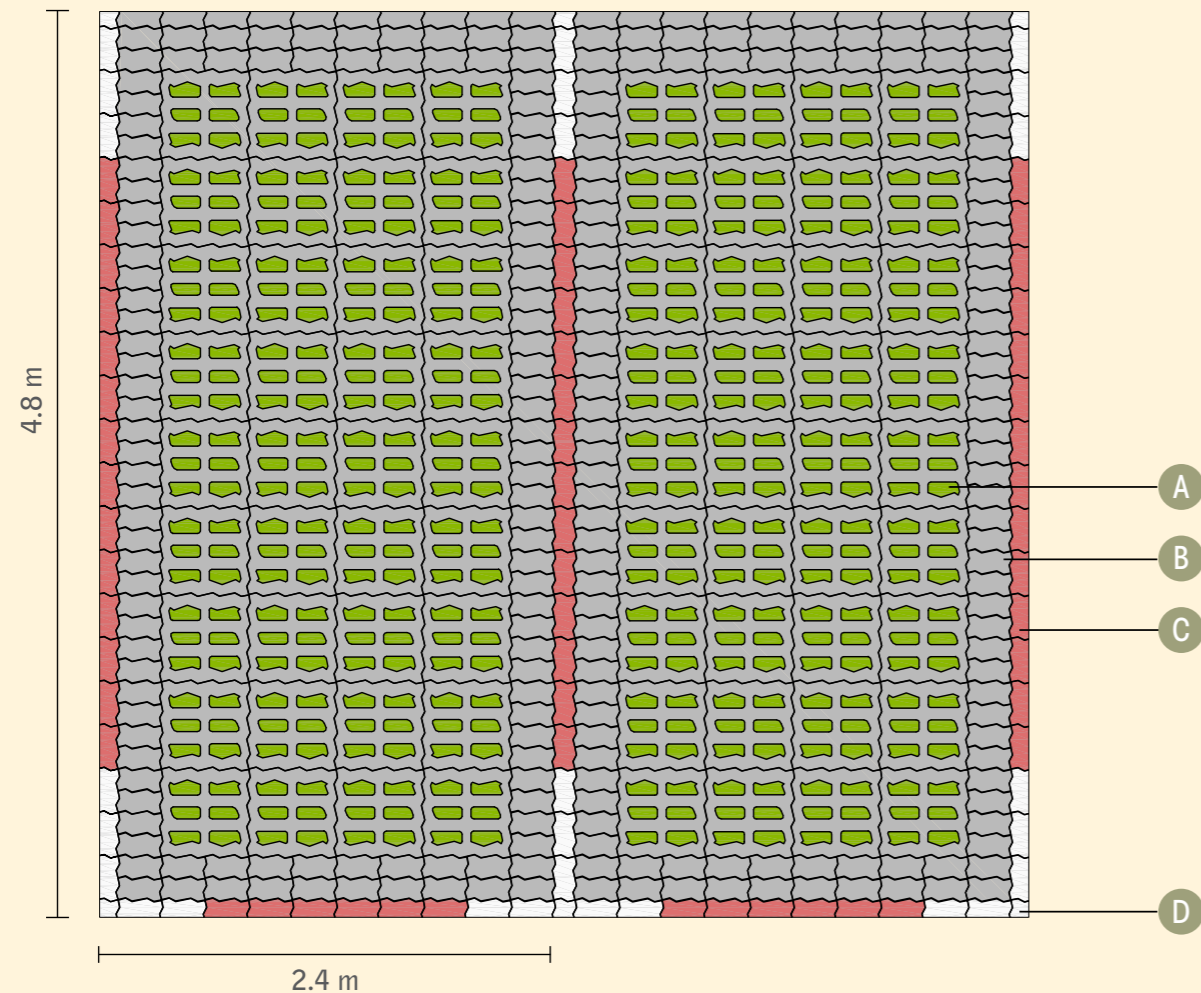

GENERAL INFORMATION

The thickness and design of a concrete segmental pavement is subject to:

- Traffic volume estimation
- Soil and subgrade investigation
- Surface design
- Basecourse thickness design
- Design considerations for low-strength subgrades or irregular-shaped areas

STRENGTH

COMPRESSIVE	Super Uni-Pave	49MPa
TRANSVERSE	Super Uni-Grasspave	19Kn

* We manufacture in accordance to BS 6717 : 1992 or BSEN 1338 : 2003

ABSOLUTE DURABILITY

- Minimal maintenance
- Hard wearing surface
- Resists damage caused by oil spillage and most industrial chemicals

IMMEDIATE USE ADVANTAGE

- Can be opened to traffic immediately upon completion of paved area

EASY ACCESS TO UNDERGROUND UTILITY SERVICES


- Can be lifted, relaid easily and rapidly without unsightly scars

EFFLORESCENCE

This superficial phenomenon is commonly found in most concrete-based or cementitious products. However, this efflorescence effect will disappear over time (weathering) whereby rain usually washes the efflorescence away in about six months to a year and in the worst scenario could take two years.

Note : Finished product colour may vary, subject to the colour of sand, cement and colour pigments used at the time of production.

TYPICAL PAVEMENT CROSS-SECTION

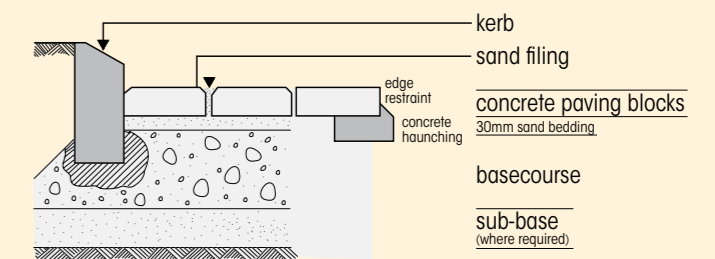

STANDARD COLOUR



Black

Grey

Red

PREMIUM COLOUR



White

Blue

Yellow

Authorised Distributor
 BA Contracts Pte Ltd
 48 Toh Guan Road East, #03-129,
 Enterprise Hub, Singapore 608586
 Tel: +65 6842 2239
 Fax: +65 6848 1229
 Email: hello@bac.com.sg

SUNWAY®
BUILDING
MATERIALS

SUNWAY PAVING SOLUTIONS SDN BHD
 (77490-W)

**Factory:
 Batang Kali**

Lot 10071, Mukim Batang Kali,
 44300 Daerah Ulu Selangor,
 Selangor Darul Ehsan, Malaysia
 Tel: (603) 6057 2407
 Fax: (603) 6057 2423

**Northern Region Sales & Marketing
 Office/Factory: Nibong Tebal**

Lot 2788, 2796, 2797,
 Kawasan Perindustrian Bukit Panchor,
 Mukim 7, Nibong Tebal,
 Seberang Perai Selatan,
 14300 Pulau Pinang, Malaysia
 Tel: (604) 593 8697/8
 Fax: (604) 593 8695



**East Coast Region Sales & Marketing
 Office/Factory: Marang**

Lot PT 16574,
 Kawasan Perindustrian, Bukit Kor,
 21600, Mukim Rusila,
 Marang, Terengganu Darul Iman.
 Tel: (609) 617 3925
 Fax: (609) 617 3923

**HQ Sales &
 Marketing Office**

#3.2, Level 3,
 Menara Sunway,
 Jalan Lagoon Timur,
 Bandar Sunway
 47500, Selangor Darul Ehsan,
 Malaysia.
 Tel: (603) 5639 8282
 Fax: (603) 5639 9600, 5639 9606

**Southern Region Sales & Marketing
 Office/Factory: Senai**

PLO 6, Jalan Lapangan Terbang,
 Fasa 1, Kawasan Perindustrian Senai,
 81400 Senai, Johor Darul Takzim, Malaysia
 Tel: (607) 599 5553
 Fax: (607) 599 3827

E-mail: spsales@sunway.com.my Website: www.sunwaypavingsolutions.com



IKRAM

Information contained within this brochure is correct at the time of printing (November 2015). Colours shown are reproduced as close to the actual colours as printing technology allows. Measurements are approximate. While every reasonable care has been taken in preparing this brochure, we cannot be held responsible for any inaccuracy. All illustrations are artist's impressions only. This brochure does not form any part of the contract.